


209.00 EUR
incl. 19% VAT, plus [shipping](#)

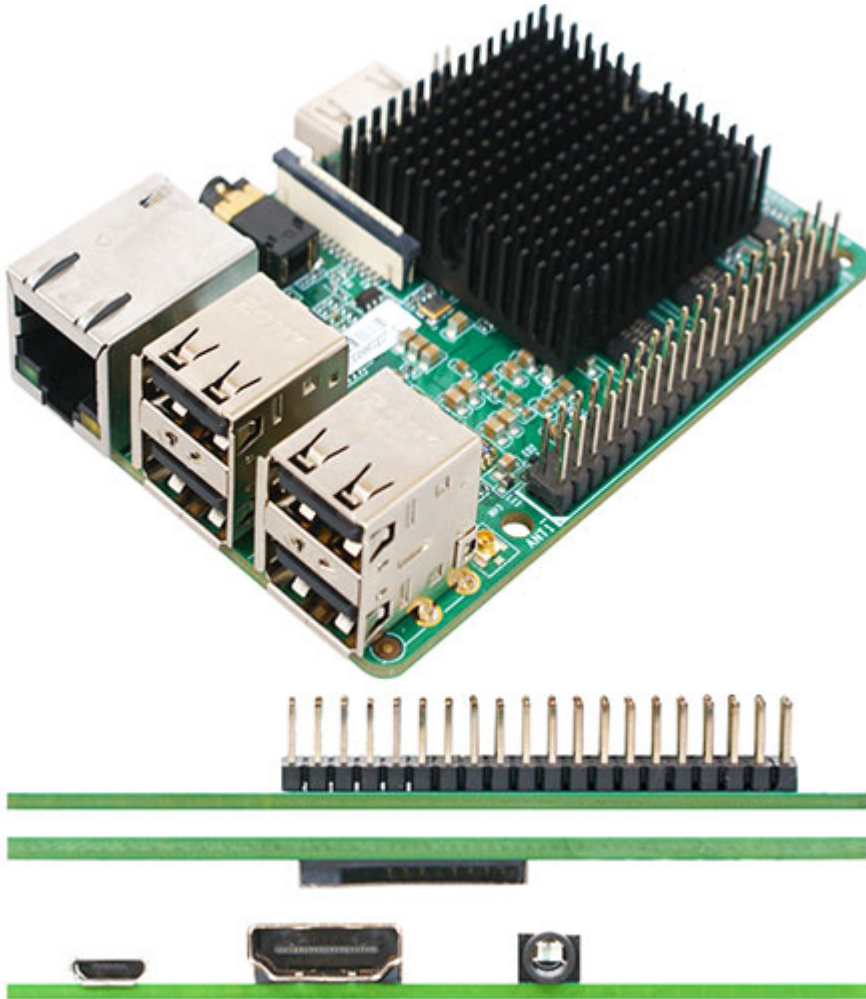

- Rockchip® ARM Cortex A17 RK3288 Quad-core 1.8GHz
- On board 1333/2GB DDR3L DRAM up to 4GB
- On board 8G Flash ROM up to 64GB
- 1* Realtek GbE, 1* 26bit GPIO, 4* USB2.0, 1* OTG, 1* HDMI, 1* MIPI DSI, 1* MIPI CSI
- 1* Micro SD up to 64GB
- Support 802.11 b/g/n 2.4G, BT-V4.0
- Support Android 5.1 and Debian9.0

Model	
Model	– JR3288A-DG2N
Part Number	– JR3288A-DG2N
Form Factor	
Dimensions	– 85 * 56mm (1.8")
Processor System	
Processor/CPU	– Rock Chip® ARM Cortex A17 RK3288 Quad-core 1.8GHz – Rock Chip® RK808-B PMU
Memory	
DRAM	– Onboard DDR3L 1333MHz 2GB
Expansion Slot	
Dimensions	– 1* Micro SD
Graphics	

Graphics	<ul style="list-style-type: none"> - Mali T764 GPU, shared memory - 1* HDMI (Max Resolution: 1920x1080@60Hz) - 1* MIPI DSI (Max Resolution: 1920x1080@60Hz) - Support Dual Displays
Ethernet	
Ethernet	- 1* Realtek RTL8211E-VB GbE
Wifi	- 1* Realtek RTL8723BS 802.11b/g/n 2.4G WIFI and BT-V4.0
Audio	
Audio	- 2 channel HD audio: ES8316
Storage	
Storage	- 8GB Flash ROM (Max 64GB)
I/O Port	
Rear I/O	<ul style="list-style-type: none"> - 1* OTG (OTG Co-lay DC Jack 5V) - 1* HDMI - 1* AUDIO - 2* USB2.0 (Left Side) - 1* Ethernet (Left Side) - 1* Micro SD (Right Side)
Internal I/O	<ul style="list-style-type: none"> - 26bit GPIO - 1* MIPI DSI - 1* MIPI CSI - 1* I2C
Watchdog Timer	
Watchdog Timer	<ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments(10sec ~ 255min)
Power	
Power	5V DC-in(PWR Con) <ul style="list-style-type: none"> - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Compliance	
Certifications	- CE, FCC, LVD, RoHS, REACH
Environment	
Temperature	<ul style="list-style-type: none"> - Operating: -10°C ~ 60°C - Storage: -20°C ~ 70°C
Warranty	
Warranty	- 2 Years Limited Warranty